


Sagging Tester

BGD 225 Sagging Tester produced by our company is in accordance with the specification of ISO 16882, ASTM D3730, Customized range and overall dimensions can be provided in accordance with ASTM D4400 standards.. They are made of corrosion resistant stainless steel, The width of application is 75mm at 6mm per sagging thickness, the gaps are being separated by a 1mm space as a marking on each sagging for distinctive identifications of each sagging.

They are applicable to determine the relative sag resistance of a series of paints in order to provide the technical parameters for the paint application in site.

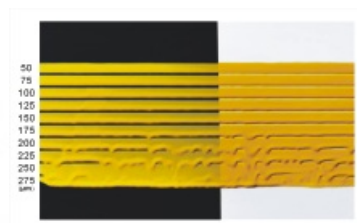

Main Technical Parameters:

★ Difference between adjacent two notches: 25μm

★ Overall dimensions: 120mm × 20mm × 20mm (L × W × H)

★ Come with Calibration Certificate

★ Ordering information	BGD 225/1	BGD 225/2	BGD 225/3	BGD 225/4	BGD 225/5
Range	50–275μm	250–475μm	450–675μm	650–875μm	850–1075μm

Manual:

Drawdown the coatings on a material (glass, test chart or board) using the appropriate sagging Thickness Gauges, then place the coated material at vertical position (90°) to the platform (eg: table). Allow 10 to 30 minutes (depending on the viscosity) for the coatings to sag under gravity. Check out the coating thickness without the sagging effect and the next coating thickness with the sagging effect. With that information, the recommended coating thickness is between the 2 layers of coatings.